

PRODUCT DATASHEET



RD-FR Non-Combustible Decking Support Pedestal

Fully non-combustible (Euroclass A1 and A1_{FL} fire rated) decking pedestal manufactured from steel, with Astec 3000 zinc-nickel electroplating for corrosion resistance. Provides super strong support for decking or flooring joist.

- Each pedestal capable of supporting loads in excess of 3500kg
- Large height range available
- 30 year warranty, 60 year design life
- Perfect for terraces, podiums, roof decks and inset balconies
- Designed and manufactured in the UK

UPPER THREADED SECTION

Internally threaded rigid tube, easily allows millimetre perfect adjustment within the given height range.

LOWER THREADED SECTION



Externally threaded rigid tube. Features locking ring, which ensures absolute stability.

PEDESTAL HEAD

Rigid pedestal head, welded to upper threaded section provides totally rigid support for decking. Accommodates joists of 50mm. Features holes in either side for simple fixing to joist.

WIDE SUPPORTING BASE

Totally flat supporting base evenly spreads the load, protecting membranes and surfaces. Holes enable pedestals to be fixed to surface where applicable.

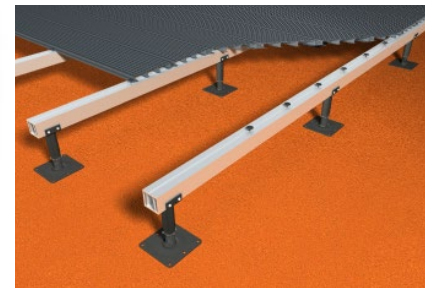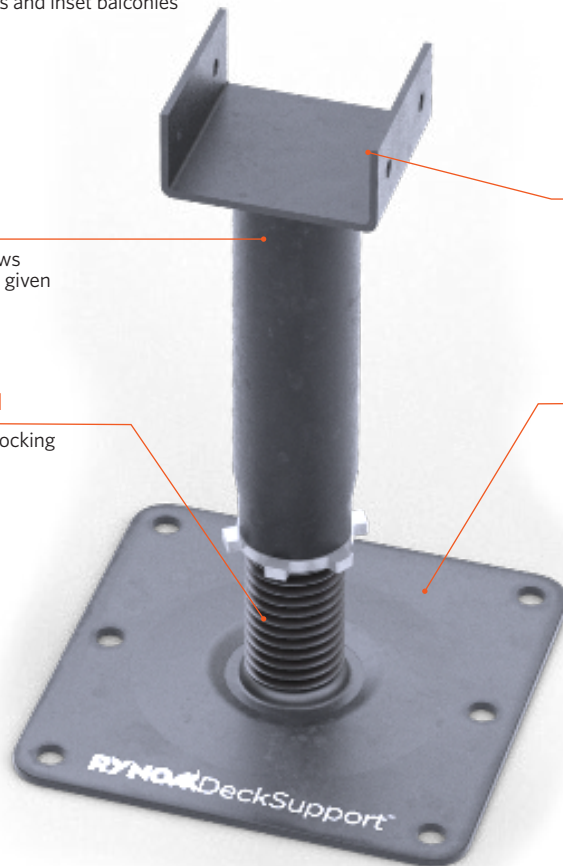

TECHNICAL SPECIFICATION

Product Material	Astec 3000 zinc-nickel electroplated mild steel			
Height Range	RD-FR-1 25-35mm	RD-FR-4 70-115mm	RD-FR-7 305-405mm	RD-FR-8 405-505mm
	RD-FR-2 35-50mm	RD-FR-5 115-205mm		
	RD-FR-3 50-70mm	RD-FR-6 205-305mm		
Compressive strength	3500kg+ per pedestal			
Base Dimensions	120 x 120mm			
Bearer Capacity	50mm			
Biological/Chemical	Resistant to moulds, algae, alkali, bitumen, UV			



Castlepoint
Castle Way
Ellon AB41 9RG

01358 726000
sales@rynogroup.co.uk
rynogroup.co.uk