

# RP-FR Adjustable Paving Support Pedestal



## Overview

Non-combustible adjustable paving pedestal manufactured from steel, with zinc-nickel electroplating for corrosion resistance. Millimetre perfect adjustability between 25 and 505mm.

- Suitable for all calibrated paving types, including porcelain, concrete, and natural stone
- Locking ring ensures absolute stability
- Large height range available
- Perfect for terraces, podiums, roof decks and inset balconies
- Holes in base for fixing to substrate if required.




## Performance

<b>Product material</b>	Zinc-nickel electroplated mild steel
<b>Reaction to fire</b>	A1
<b>Compressive strength</b>	4400kg+
<b>Base dimensions</b>	120x120mm (170mm round spreader plate available)
<b>Head diameter</b>	90mm
<b>Spacer tabs</b>	4mm (2mm, 6mm, 8mm and 10mm available on special order)
<b>Biological/chemical</b>	Resistant to moulds, algae, alkali, bitumen, UV
<b>Warranty</b>	30 years
<b>Design life</b>	60 years

## Sizes


Code	Adjustable height range	Weight
<b>RP-FR-1</b>	25-35mm	0.46kg
<b>RP-FR-2</b>	35-50mm	0.5kg
<b>RP-FR-3</b>	50-70mm	0.53kg
<b>RP-FR-4</b>	70-115mm	0.58kg
<b>RP-FR-5</b>	115-205mm	0.92kg
<b>RP-FR-6</b>	205-305mm	1.11kg
<b>RP-FR-7</b>	305-405mm	1.28kg
<b>RP-FR-8</b>	405-505mm	1.39kg

## Accessories



### Head shock pad

Head shock-absorbent gaskets fit on top of the paving supports, cushioning tiles and removing the possibility for grit to cause grinding between tile and pedestal head.



### Base shock pad

Base shock-absorbent membrane pads can be installed under the pedestal/support base to enhance acoustic properties, or to provide additional protection to the waterproof system.



### Edge spring clip


The edge spring clip fits on top of paving supports around the periphery of paved areas to ensure uniform spacing against wall abutments, helping ensure rapid drainage. By tensioning the tile bed, it counteracts creepage and movement.



### Spreader Plate

For applications where the substrate requires lower point pressure, the 170mm circular spreader plate can be attached to the underside of the pedestal base

## Compatible Systems

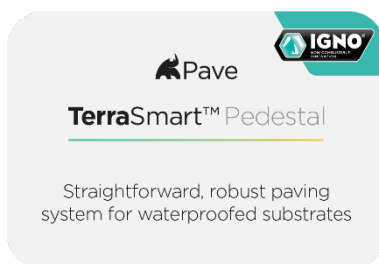

**Got questions?**

**Speak to one of our expert advisors**

Visit [www.rynogroup.co.uk](http://www.rynogroup.co.uk) or call us today on **+44 (0)203 967 3500** or reach out on [sales@rynogroup.co.uk](mailto:sales@rynogroup.co.uk).