



## Porcelain Bridge Saw




## Levels

Rotating laser level plus a standard level is recommended




## Ball ended hex key

Available from RYNO



## Tape Measure

Measure twice cut once and repeat




## Nail Punch Set

Available from RYNO



## Site PPE

Adhere to all relevant site regulations




# General Notes


- On delivery, all products should be inspected. If there are any issues with our products, please report them immediately and do not commence installation
- Safe working practise should be observed at all times during the installation process and all necessary Personal Protective Equipment (PPE) should be worn
- Cutting porcelain should be carried out using a water and dust suppressed diamond tipped power saw
- Always use appropriate torque setting on cordless screwdriver for screws
- Always use correct PPE throughout installation

1. Determine the desired slab layout:
  - a. Full slab starting in the corner of the area with cut slabs at the end
  - b. Full slab starting in the centre of the area with cut slabs around the perimeter
2. Use a nail punch and hammer to fold down spacer tabs on the pedestals:
  - a. All 4 spacer tabs for edge support. **Fig A.**
  - b. Two aligning spacer tabs for edge support. **Fig B.**

**(A)**

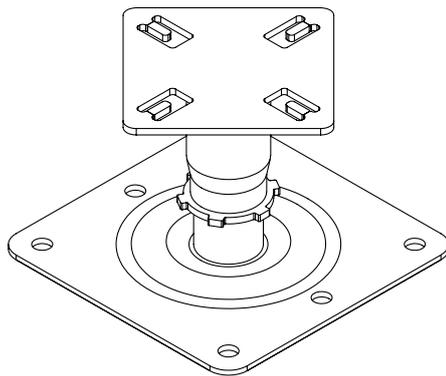


**(B)**

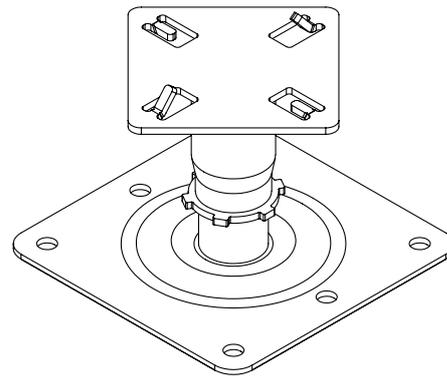


3. Place head rubber shockpads on top of pedestals. **Fig C.**

**(C)**

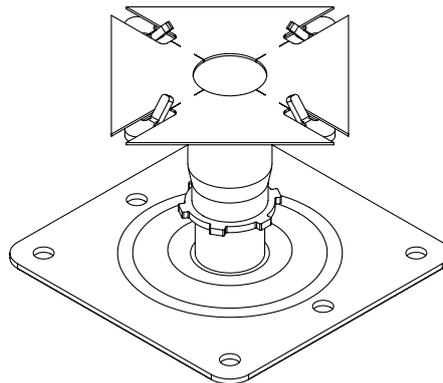


4. Place the first 4 pedestals in the desired area. When positioning pedestals along the perimeter of an area, ensure edge spring clips are used to create uniform spacing along these edges. **Fig D.**

(D)

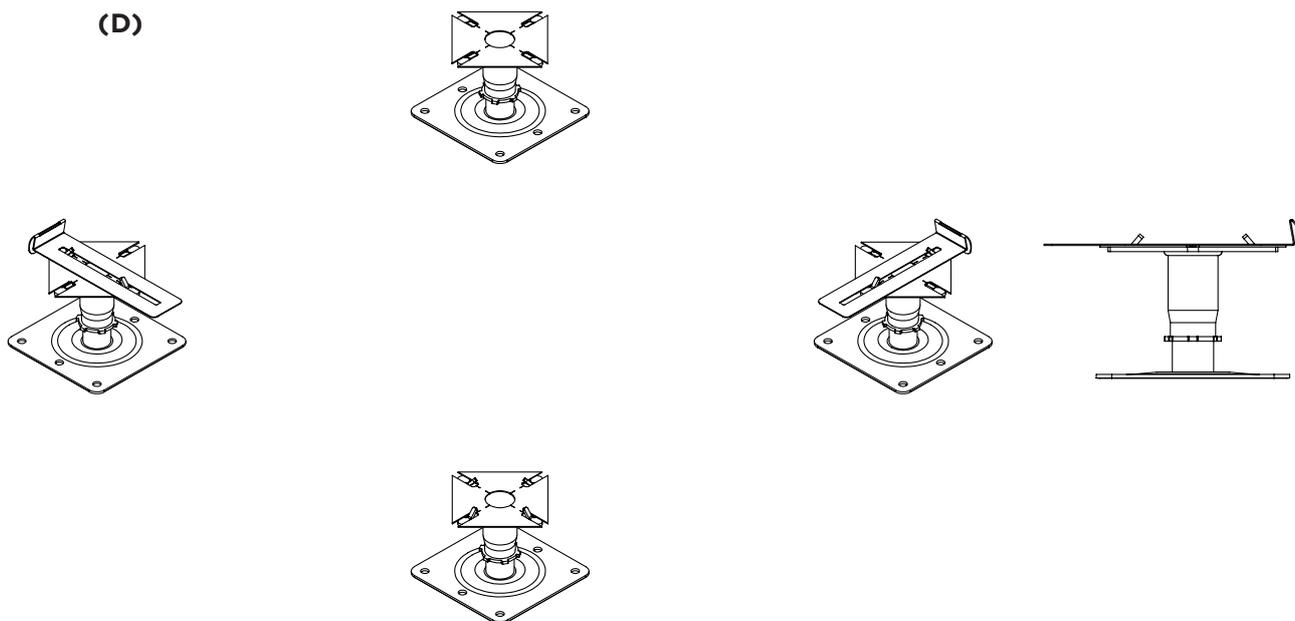


5. Lay slab on top of pedestals. Set the height of the slab and pedestals by placing a spirit level diagonally on the slab and twisting the pedestal upper shaft clockwise (down) or anti-clockwise (up). Tighten the locking nut to lock the pedestal height. **Fig E.**

(E)

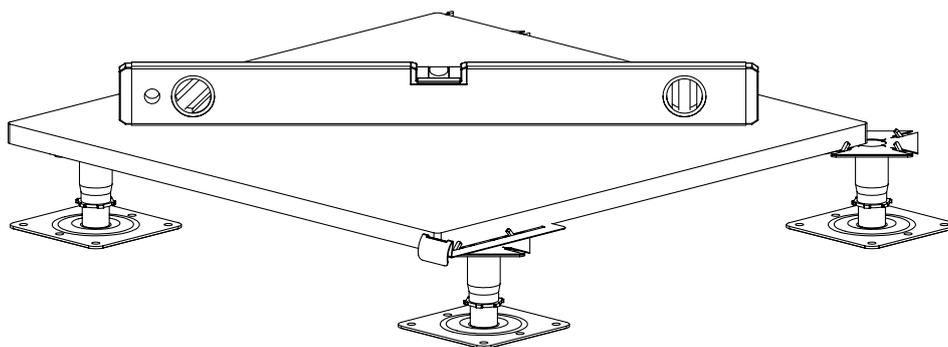


6. Position the next set of pedestals in place and lay slab on top. **Fig F.**

**(F)**

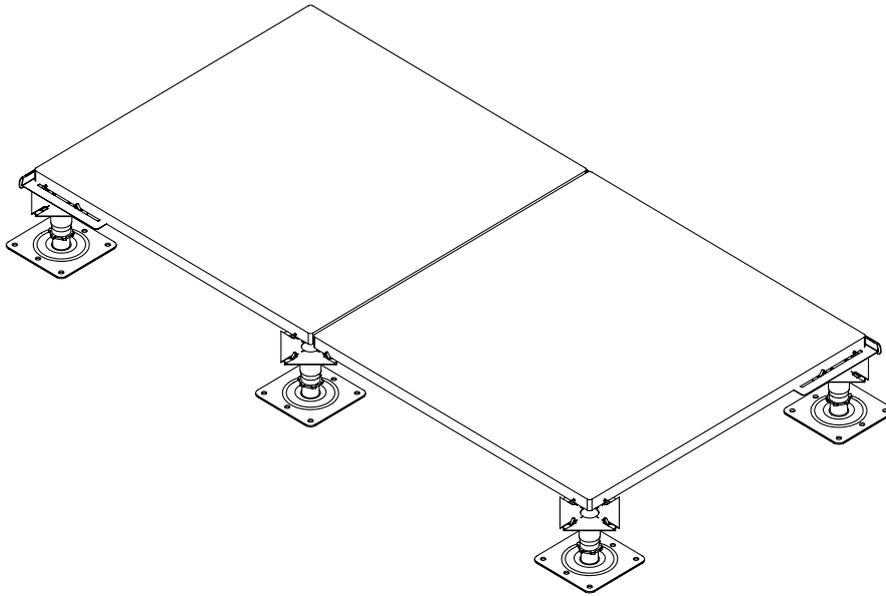

**7.** Level the slab with the previous by using a spirit level and raising/lowering the pedestals as described in point 5. If necessary, you can make minor adjustments to finished surface level by adding sections of head rubber shockpads beneath the tiles. **Fig G.**

**(G)**

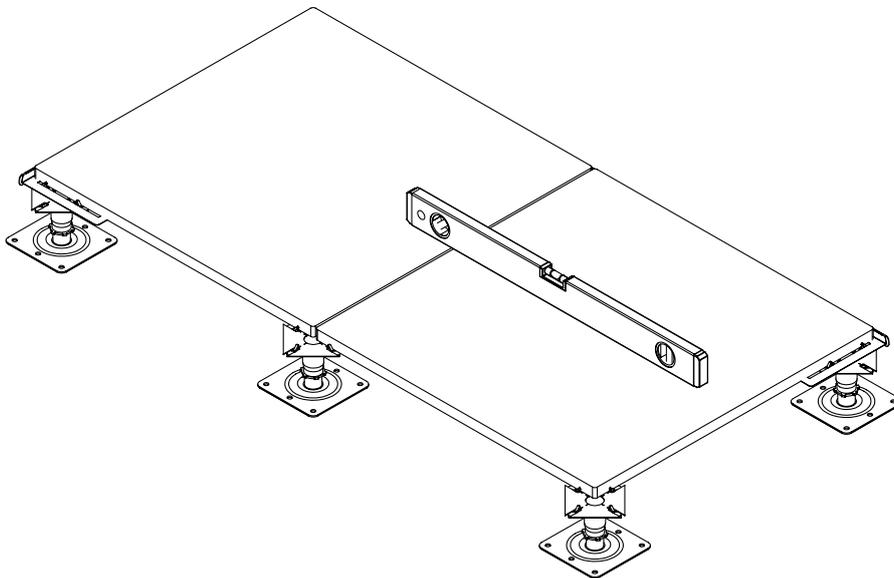

**8.** Repeat steps 5-7 until the area completed.

# Contact



## **Head Office**

Castlepoint  
Castle Way  
Ellon  
AB41 9RG

## **The Studio**

2 Sutton Lane  
off Clerkenwell Road  
London  
EC1M 5PU

## **Telephone:**

+44 (0)203 9673500

## **Email:**

[enquiries@rynogroup.co.uk](mailto:enquiries@rynogroup.co.uk)

Ryno Ltd  
Registered no: 09623250  
VAT no: GB 214 3190 46

Registered address: Europa House,  
Alford Road, Cranleigh, GU6 8NQ